

# Hydraulic power brake valve

Model MB08-HMD

**RA 66140**

Edition: 08.2014

Replaces: 05.1994



- ▶ Component series 20
- ▶ Service brake pressure 35, 40, 60, 70, 80, 100, 120, and 150 bar braking

## Features

- ▶ Compact design
- ▶ Integrated maximum pressure limitation of the brake circuits
- ▶ Brake pressure proportional to actuation force
- ▶ Low hysteresis
- ▶ Brake line pressure synchronization
- ▶ Line mounted
- ▶ Rugged construction
- ▶ Optional treadle-style foot pedal

## Contents

Ordering code	2
Technical data	3
Function	4
General notes	5
Intended use	5
Characteristic curves	6
Dimensions	7

2 **MB08-HMD** | Dual-circuit power brake valve  
Ordering code

### Ordering code

01	02	03	04	05	06	07	08	09			
<b>MB</b>	<b>08</b>	<b>-</b>	<b>HM</b>	<b>D</b>	<b>-</b>	<b>20</b>	<b>/</b>	<b>19</b>	<b>M</b>	<b>/</b>	

01 to 04	This information is used only for internal purposes and is always identical.	<b>MB08-HMD</b>
----------	--	-----------------

#### Component series

05	20	<b>20</b>
----	----	-----------

#### Service brake pressures

06	35 bar	506/667 PSI	35/46 bar	Linear	<b>35</b>
	40 bar	580/769 PSI	40/53 bar	Linear	<b>40</b>
	60 bar	870/1131 PSI	60/78 bar	Linear	<b>60</b>
	70 bar	1015/1305 PSI	70/90 bar	Linear	<b>70</b>
	80 bar	1160/1463 PSI	80/101 bar	Linear	<b>80</b>
	100 bar	1450/1840 PSI	100/127 bar	Linear	<b>100</b>
	120 bar	1740/2200 PSI	120/152 bar	Linear	<b>120</b>
	150 bar	2164/2715 PSI	149/187 bar	Linear	<b>150</b>

#### Line connections

07	SAE straight thread O-ring ports			<b>19</b>
	Supply pressure port	P1, P2	SAE-06	
	Tank port	P1, P2, T1, T2	SAE-06	
	Brake service ports	B1, B2, BLS1, BLS2	SAE-06	
	Auxiliary pressure port	ACS1, PLT	SAE-04	

#### Seal material

08	NBR seals, suitable for mineral oil (HL, HLP) according to DIN 51524	<b>M</b>
----	--	----------

#### Options

09	<i>Option codes – further details in clear text</i>	
	With optional treadle-style foot pedal (R978728913) – mounted	<b>FP</b>
	Dual-slope metering characteristics (with nested stage inner spring)	<b>DSM</b>

#### Service seal kit

Material description	Ordering No.
<b>Kit-Seal, Brake Valve</b>	<b>R978726675</b>

Note: Seal kit contains shaft seal, dust cover, and O-ring.

**Technical data**

<b>General</b>				
Weight	Without pedal	lb (kg)	4.0 (1.8)	
	With standard pedal	lb (kg)	5.3 (2.4)	
Installation positions			Variable mount possible	
Type of connection			SAE straight thread ports per J1926-1 or ISO 11926-1	
Ambient temperature range		$\theta$	°F (°C)	-13 to +176 (-25 to +80)
<b>Hydraulic</b>				
Maximum service brake pressure at port	B1, B2, BLS1, BLS2, PLT	$p$	PSI (bar)	3000 (207)
Maximum inlet pressure at port	P1, P2, ACS1	$p$	PSI (bar)	4000 (276)
Maximum tank pressure at port	T	$p$	PSI (bar)	10 (0.7) Maximum continuous back pressure. No oscillation permitted.
Hydraulic fluid		Mineral oil (HL, HLP) according to DIN 51524, other hydraulic fluids, such as HEES (synthetic esters) according to VDMA 24568 as well as hydraulic fluids as specified in the data sheet 90221, on inquiry.		
Hydraulic fluid temperature range		$\theta$	°F (°C)	-4 to +80 (-20 to +26.7)
Viscosity range		$\nu$	SSU (mm <sup>2</sup> /s)	40 to 1800 (2.8 to 380)
Maximum permitted degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)			Class 17/14 or better	

**Note:**

For applications outside these parameters, please consult us!


## Function

The dual circuit hydraulic power brake valve contains two direct-operated 3-way pressure reducing valves in one assembly, with smooth mechanical operation. The two spools regulate brake line circuit pressure proportional to force applied to the actuator. In the event of failure of either single circuit, the operation of the remaining element is unaffected and operating force remains unchanged.

Dual circuit power brake valve components include: housing (1 & 2) regulating spool (3), regulating spring (4), actuator (5), and the return springs (6 & 7).

The operator depresses the actuator (5). The regulating spring (4) strokes the regulating spools (3), closing off the T ports and opening the brake circuit ports B1 & B2 to accumulator pressure through supply pressure ports P1 & P2. Pressures from brake circuit ports B1 & B2 are communicated to return spring chambers (6 & 7), where feedback force is developed, opposing the operator's input force. When the sum of feedback force and return springs pre-load (6 & 7) is equal to the operator input force transmitted through regulating spring (4), the regulating spools move to a blocked center condition where the P, T, B1, and B2 ports are closed simultaneously. When operator (5) input force is removed, the regulating elements move to the standby position, blocking the pressure ports P1 & P2 and venting the service ports B1 & B2 to tank.

### ▼ Symbol

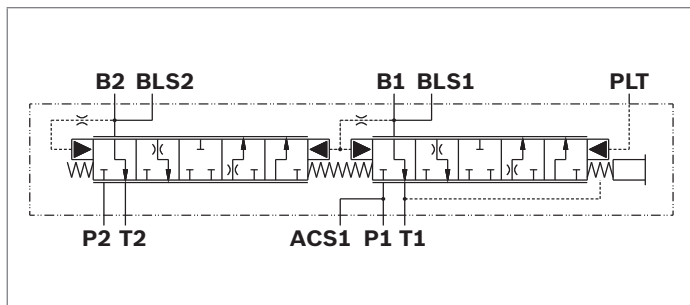


Ports	
ACS1	Accumulator charge switch port
P1, P2	Supply pressure port
T1, T2	Tank ports
BLS1, BLS2	Brake light switch ports
B1, B2	Brake system work ports
PLT	Hydraulic pilot port

If pressure falls in brake system line B or operator pushes harder on actuator (5), the supply pressure P1 & P2 is re-connected to brake system ports B1 & B2 until force is balanced again. If brake system ports B1 & B2 are too high, fluid is bled to tank through the T port until balance is again established. When force to actuator is removed, the regulating spool (3) moves to standby position, blocking the supply pressure ports P1 & P2 and venting the brake system work ports B1 & B2 to tank T.

Pressure synchronization between the pressure regulating housing primary (1) is accomplished by using the feedback pressure from housing secondary (2), chamber (6) is common to both housings (1 & 2).

### ▼ Cross-section

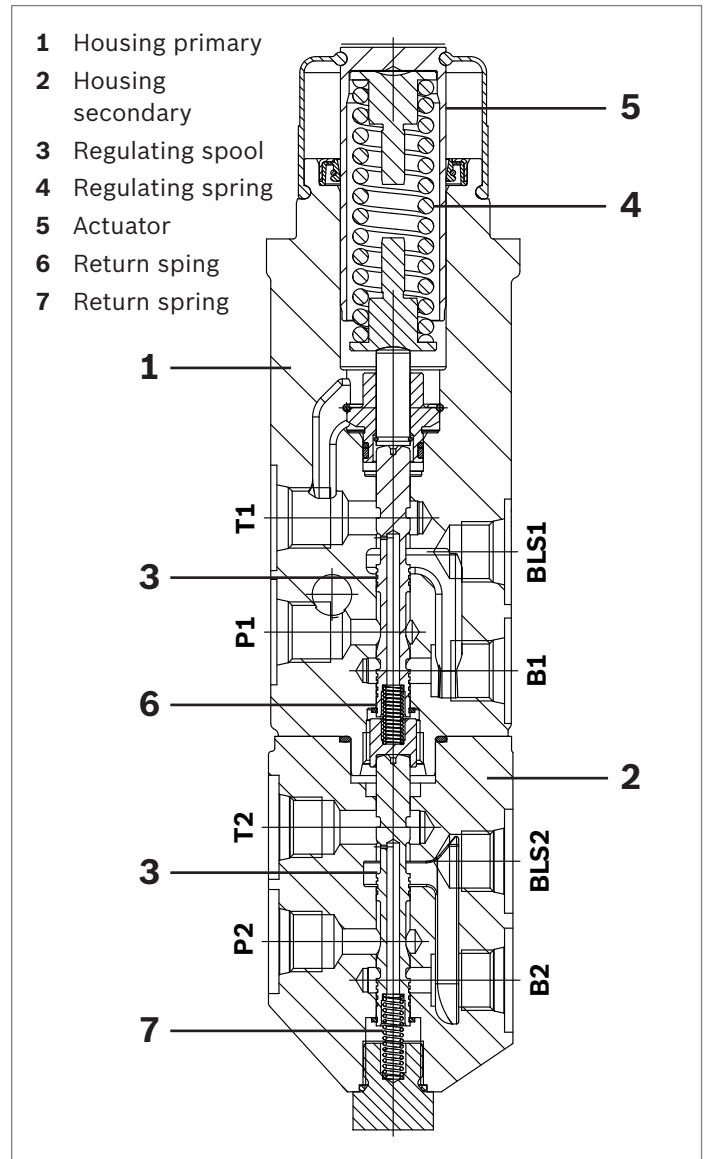

## General notes

### Installation notes

- ▶ Rubber parts must not be painted.
- ▶ Operating elements must not be directly exposed to high-pressure jet cleaning.
- ▶ The tank must be mounted above the brake valve MB08-HMD to avoid drainage of the brake valve.
- ▶ When assembling below the base plate it must be taken care that the movement of the pedal cannot be affected by dirt.

### Intended use

The MB08-HMD is exclusively intended to be assembled together with other components to form partly completed or complete machinery. The component may only be commissioned if it has been integrated in the machine for which it is designed.

### Notes for the repair

- ▶ Damaged valves must be repaired, even if their function is not impaired.

### Installation position


- ▶ Variable mount possible.

You may use the product as follows:


- ▶ The brake valves MB08-HMD have been developed for the application in mobile working machinery.
- ▶ Comply with the technical data.
- ▶ The product is only intended for professional use and not for private use.

## Characteristic curves


### ▼ Nominal metering performance, 35, English

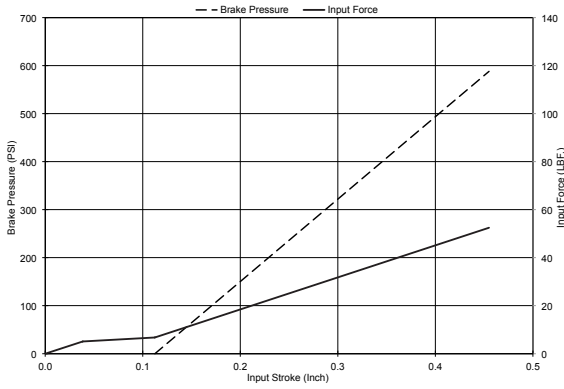


### ▼ Nominal metering performance, 35, Metric

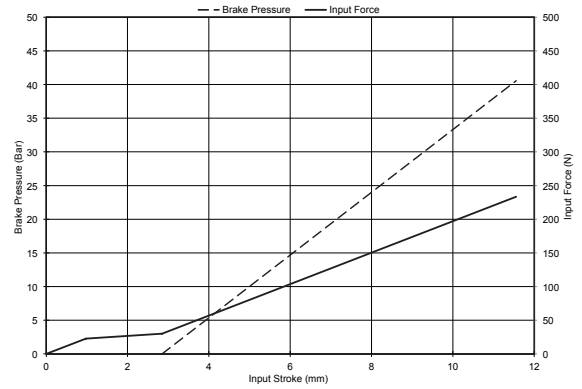


### ▼ Nominal metering performance, 40, English

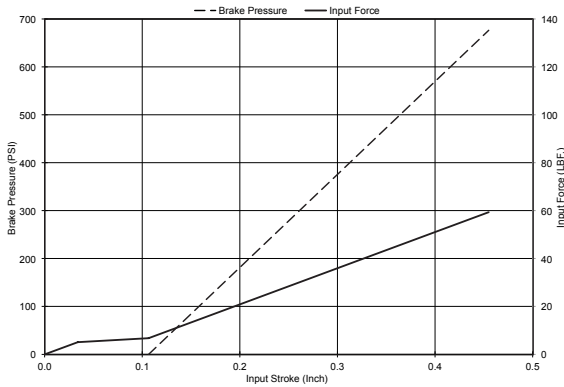


### ▼ Nominal metering performance, 40, Metric

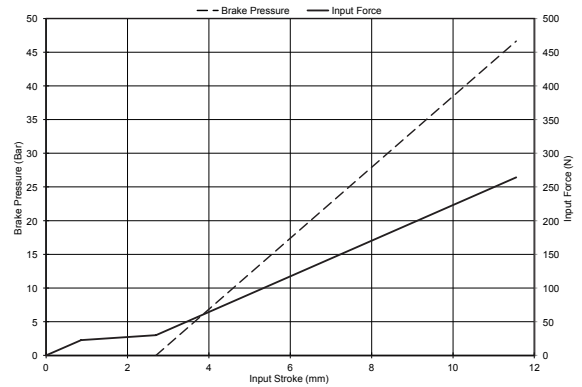


### ▼ Nominal metering performance, 60, English

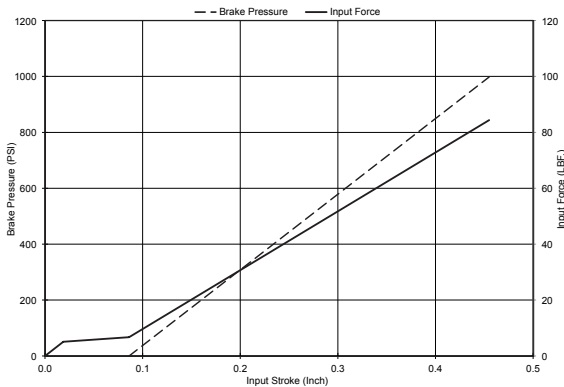


### ▼ Nominal metering performance, 60, Metric

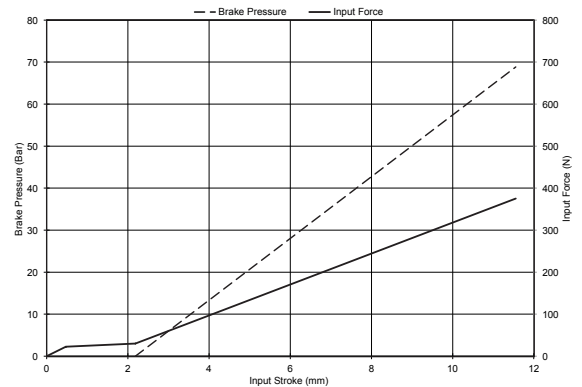

### ▼ Nominal metering performance, 70, English

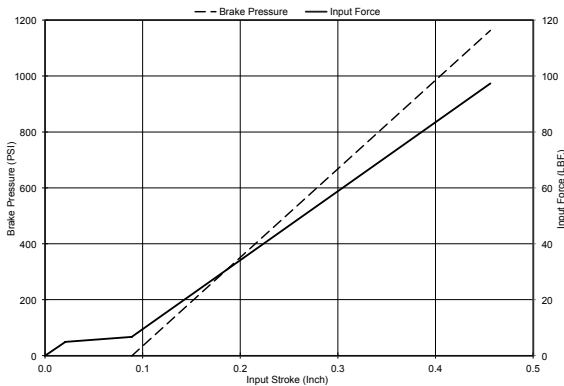


### ▼ Nominal metering performance, 70, Metric

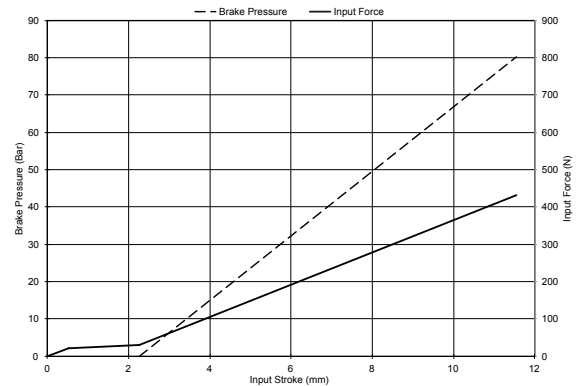


### Characteristic curves


#### ▼ Nominal metering performance, 80, English

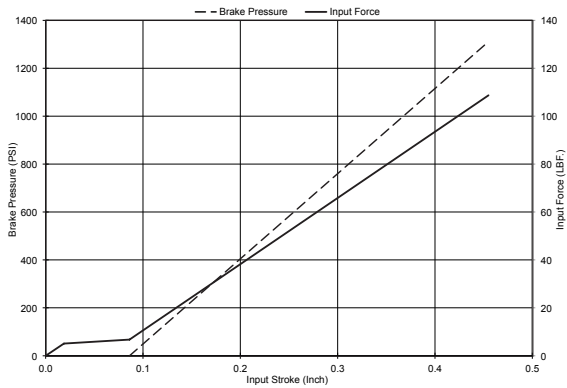


#### ▼ Nominal metering performance, 80, Metric

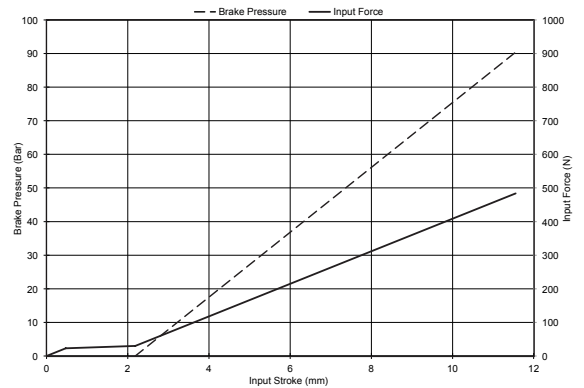


#### ▼ Nominal metering performance, 100, English

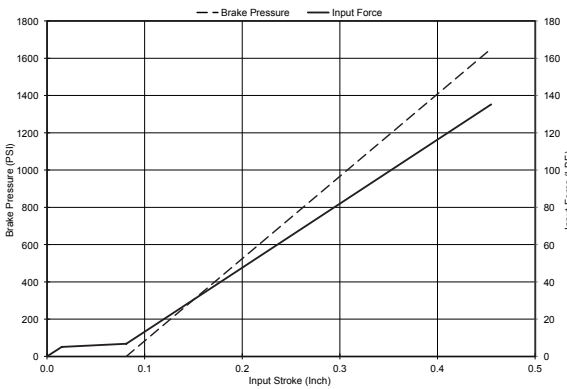


#### ▼ Nominal metering performance, 100, Metric

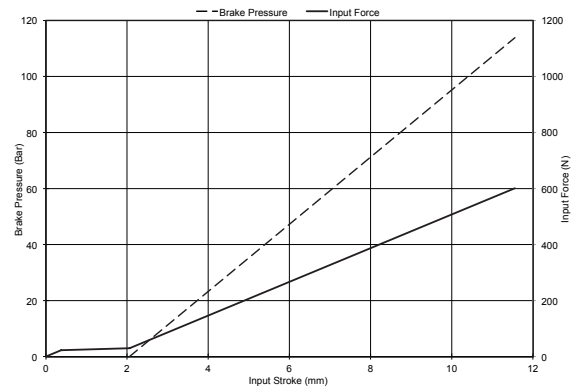


#### ▼ Nominal metering performance, 120, English

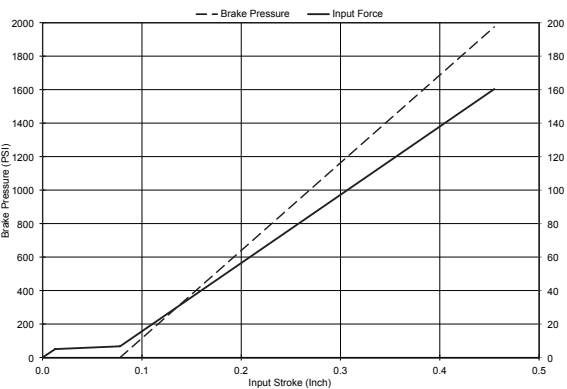


#### ▼ Nominal metering performance, 120, Metric

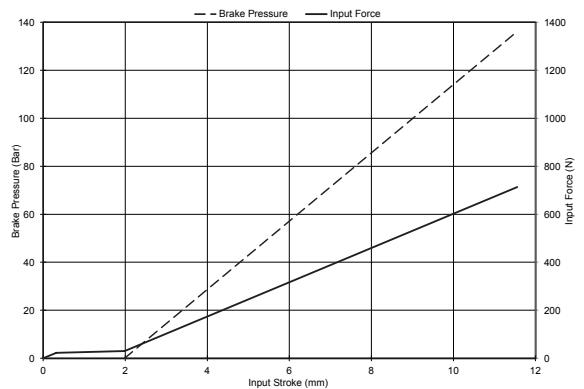

#### ▼ Nominal metering performance, 150, English

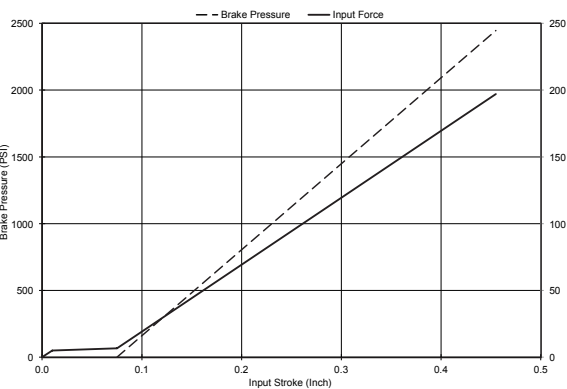


#### ▼ Nominal metering performance, 150, Metric

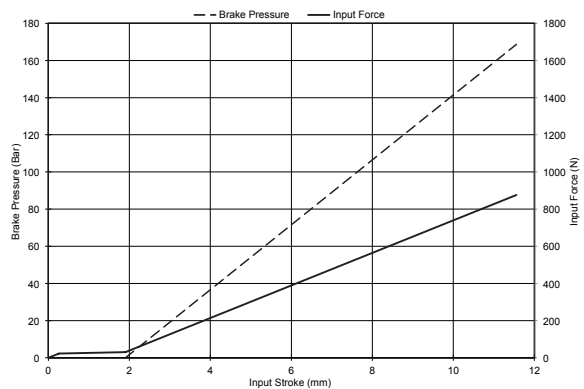

## Dimensions

▼ Without pedal

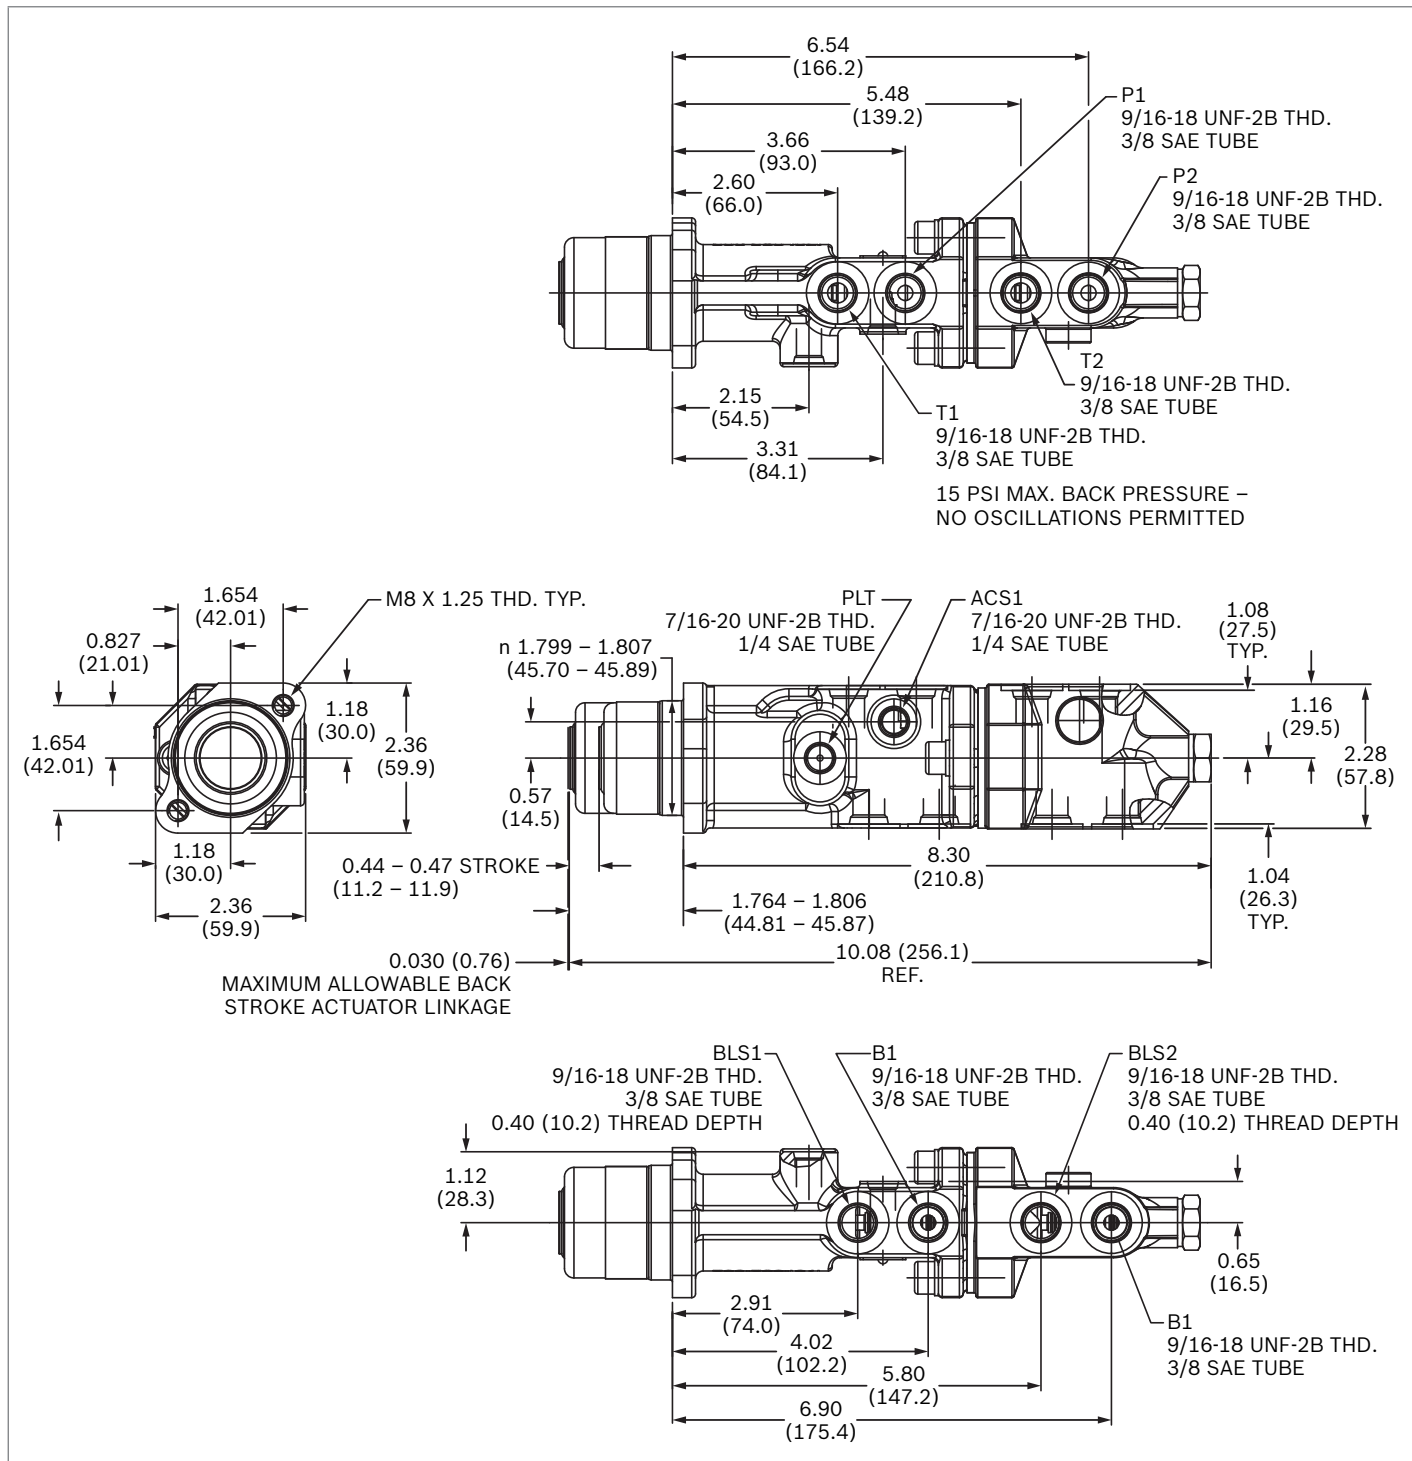


### Ports according to ISO 11926-1

Port	Dimensions	
ACS1, PTL	7/16 - 20 UNF	SAE-04
BLS1, BLS2, P1, P2	9/16 - 18 UNF	SAE-06
T1, T2, B1, B3	9/16 - 18 UNF	SAE-06



▼ With treadle-style foot pedal for option code "FP"

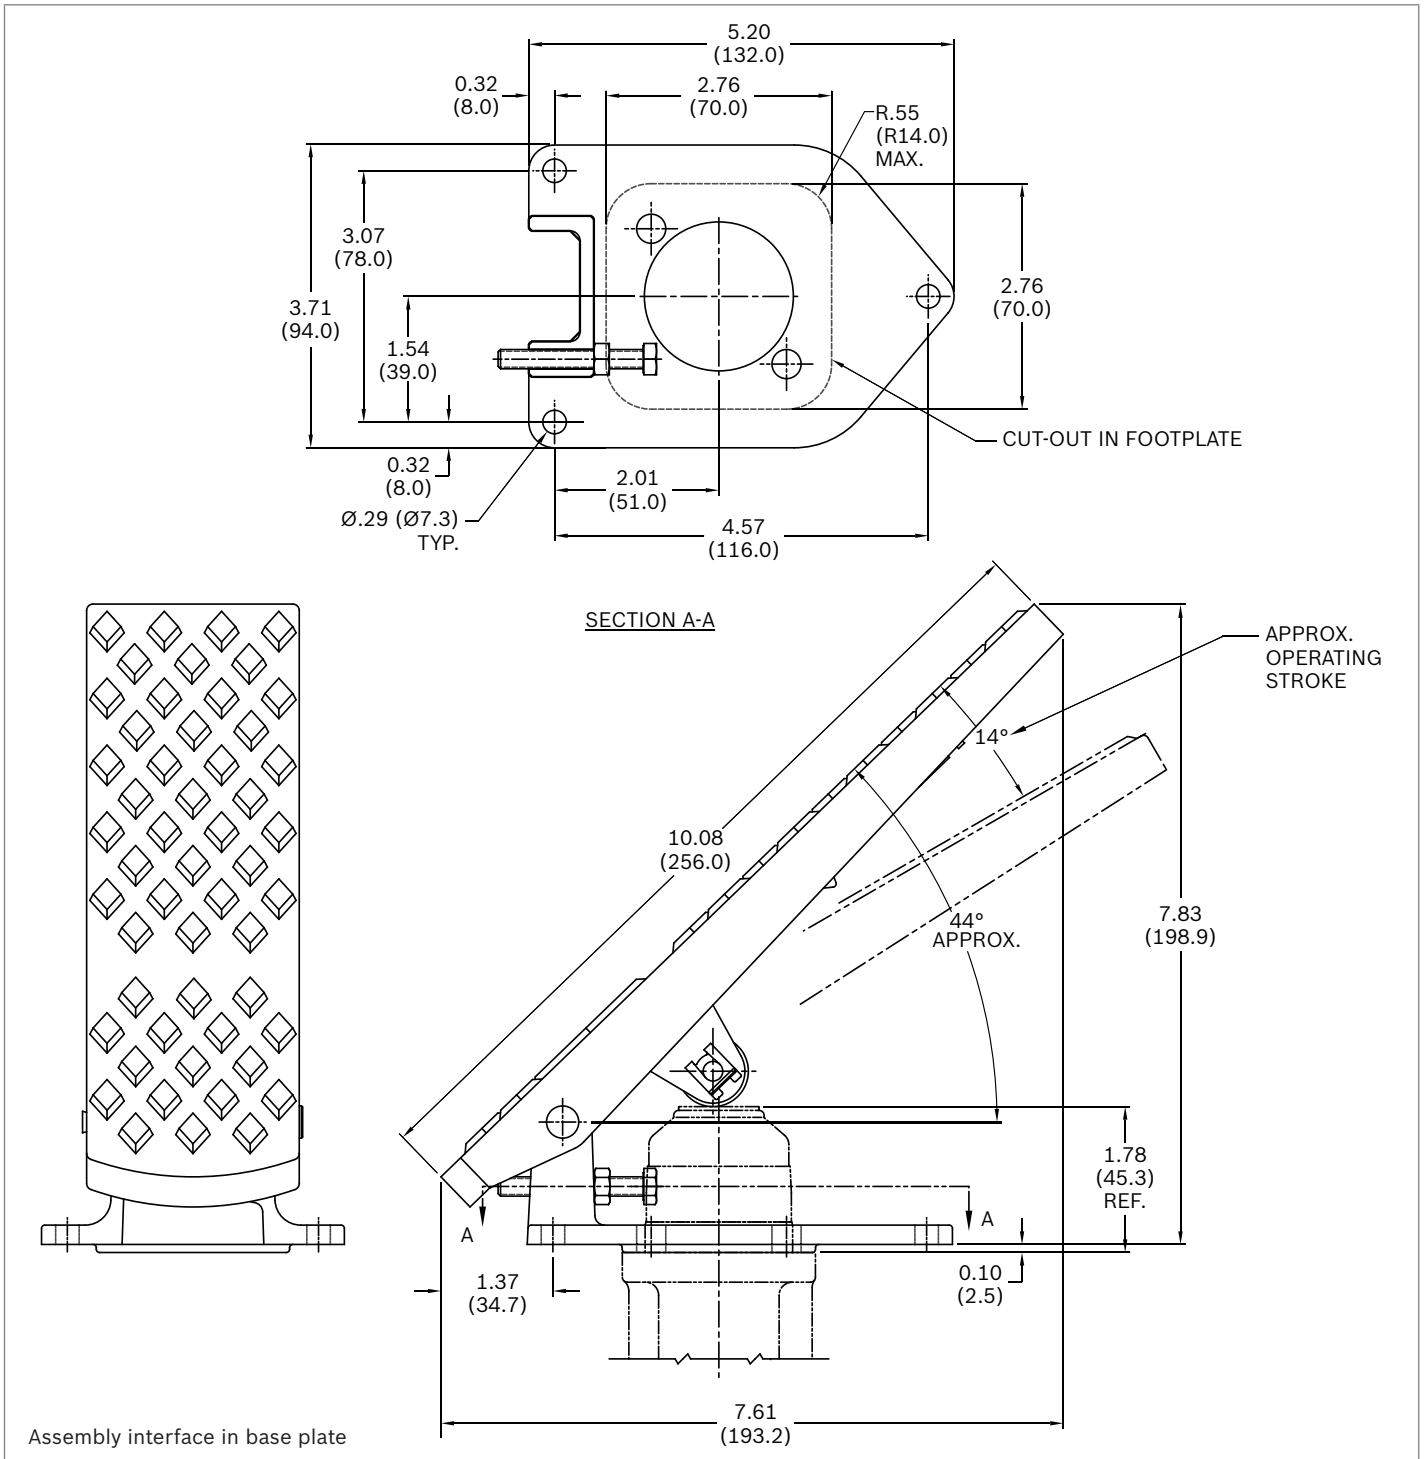

QCC LLC  
7301 W. Wilson Avenue,  
Harwood Heights, IL 60706  
708-887-5400  
[www.qccorp.com](http://www.qccorp.com)  
[www.qcc.parts](http://www.qcc.parts)

© 2021 QCC LLC

All rights reserved. Neither this document, nor any part of it, may be reproduced, duplicated, circulated or disseminated, whether by copy, electronic format or any other means, without the prior consent and authorization of QCC LLC

The data and illustrations in this brochure/data sheet are intended only to describe or depict the products. No representation or warranty, either express or implied, relating to merchantability or fitness for intended use, is given or intended by virtue of the information contained in this brochure/data sheet. The information contained in this brochure/data sheet in no way relieves the user of its obligation to insure the proper use of the products for a specific use or application. All products contained in this brochure/data sheet are subject to normal wear and tear from usage. Subject to change.